

## (12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)


(19) World Intellectual Property Organization  
International Bureau(43) International Publication Date  
1 February 2001 (01.02.2001)

PCT

(10) International Publication Number  
WO 01/07173 A1

- (51) International Patent Classification: B05C 17/005 (81) Designated States (national): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CR, CU, CZ, DE, DK, DM, DZ, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZW.
- (21) International Application Number: PCT/IE00/00091
- (22) International Filing Date: 26 July 2000 (26.07.2000)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data: S990634 26 July 1999 (26.07.1999) IE
- (71) Applicant (for all designated States except US): OGLESBY & BUTLER RESEARCH & DEVELOPMENT LIMITED (IE/IE); Industrial Estate, Dublin Road, Carlow (IE).
- (72) Inventor: and
- (73) Inventor/Applicant (for US only): OGLESBY, John X Paul (GB/IE); Anneville, Shrule, Carlow (IE).
- (74) Agent: F. F. GORMAN & CO.; 54 Merrion Square, Dublin 2 (IE).
- (84) Designated States (regional): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).
- Published:  
— With international search report.
- For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: A HEATING DEVICE

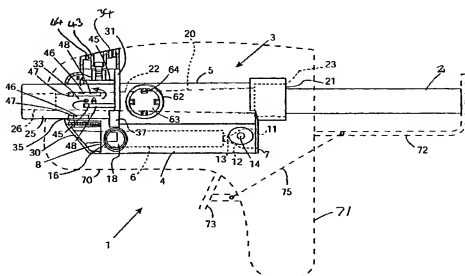

(57) Abstract: A glue gun (1) for melting a glue stick (2) comprises a heating device (3) which in turn comprises a main housing (4) having a combustion chamber (6) and a working body member (5) having a heating chamber (20) within which the glue stick (2) is melted. A gas catalytic combustion element (10) in the combustion chamber (6) converts fuel gas to heat for heating the main body member (4) for in turn melting the glue stick (2). Melted glue is dispensed through a dispensing nozzle (25). A cover (30) around the dispensing nozzle (25) forms a pair of exhaust gas passageways (33) on respective opposite sides of the dispensing nozzle (25) for conducting exhaust gases from an exhaust gas port (15) from the combustion chamber (6) to an exhaust gas outlet (34). Heat exchange fins (45, 46) form the passageway (33) into a circuitous tortuous passageway and transfer heat from the exhaust gases into the dispensing nozzle (25) for cooling the exhaust gases to a safe temperature.